



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Applicant:

Nisim HAZAN

Serial No.: 10/681,905

Filed: October 10, 2003

For: Soft Removable Thermal Shield For
A Missile Seeker Head

Examiner:

Commissioner of Patents and Trademarks
Washington, D.C. 20231

§
§
§
§
§
§
§
§
§
§
§

Group Art Unit:

Attorney
Docket: 26/582


TRANSMITTAL LETTER

Sir:

The following document is enclosed:

(1) Certified copy IL152362.

Respectfully submitted,



Mark M. Friedman
Attorney for Applicant
Registration No. 33,883

Date: November 5, 2003



מדינת ישראל
STATE OF ISRAEL

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that annexed
hereto is a true copy of the
documents as originally
deposited with the patent
application of which
particulars are specified on the
first page of the annex.

זאת לתעודה כי רצופים
בזה העתקים נכונים של
המסמכים שהופקדו
לכתחילה עם הבקשה
לפטנט לפי הפרטים
הרשומים בעמוד הראשון
של הנספח.

This 04 NOV 2003 היום
ממונה על
רשם הפטנטים
Commissioner of Patents

נתאשר
Certified

ב ק ש ה ל פ ט נ ט
Application For Patent

| | |
|-------------------------------|------------|
| מספר: Number | 152362 |
| תאריך: Date | 17-10-2002 |
| הוקדם/נרחה Ante/Post-dated | |

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)
I (Name and address of applicant, and in case of body corporate - place of incorporation)

Rafael - Armament Development Authority Ltd.
P.O.Box 2250
Haifa 31021

רפא"ל - רשות פתוח לחימה בע"מ
ת.ד. 2250
חיפה 31021

Inventor: Nisim Hazan

ממציא: ניסים חזן

בעל אמצאה מכח הדין Operation of Law
Owner, by virtue of
of an invention the title of which is

מגן טרמי רך בעל הסרה עבור ראש ביות טיל


(בעברית)
(Hebrew)

SOFT REMOVABLE THERMAL SHIELD FOR A MISSILE SEEK HEAD

(באנגלית)
(English)

hereby apply for a patent to be granted to me in respect thereof

מבקש בזאת כי ינתן לי עליה פטנט

| • בקשת חלוקה - Application of Division | | • דרישת דין קדימה Priority Claim | | |
|---|--------------------------------|---|---------------|-------------------------------------|
| מבקשת פטנט from Application | לבקשה/לפטנט to Patent/Appl. | מספר/סימן Number/Mark | תאריך Date | מדינת האויגוד Convention Country |
| No. dated | No. dated | | | |
| יפוי כח: כללי P.O.A.: general/individual-attached/to be filed later- הוגש בענין 142994 filed in case | | | | |
| המען למסירת מכתבים בישראל Address for service in Israel DR. MARK FRIEDMAN LTD. BEIT SAMUELOFF 7 HAOMANIM STREET 67897 TEL AVIV | | | | |
| חתימת המבקש Signature of Applicant | | היום 16 בחודש Oct שנת 2002 of the year of This | | |
|  | | לשימוש הלשכה For Office Use | | |

Ref.: 26/495

מגן טרמי רך בעל הסרה עבור ראש ביות טיל

SOFT REMOVABLE THERMAL SHIELD FOR A MISSILE SEEK HEAD

SOFT REMOVABLE THERMAL SHIELD FOR A MISSILE SEEKER HEAD

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to a thermal shield and, in particular, it
5 concerns a soft removable thermal shield for a seeker head of a guided missile.

By way of introduction, some guided missiles have an internal seeker
head which is disposed behind a window, which is located at the nose of the
missile. Typically, the seeker head and often the window itself are sensitive to
heat exposure, which is caused by friction of the missile body with air during
10 supersonic or hypersonic flight. This heat exposure can result in breakage to
the window and damage to the seeker head. Additionally, the seeker head is
typically not used for the entire flight, but only during the terminal phase of the
flight. Therefore, the window of the missile should be covered by a thermal
protector during the first phases of the flight while the seeker head is not used.

15 One prior art thermal protector is a rigid thermal protector which covers
the window during the first phases of the flight and which is retracted from the
window during the terminal phase of the flight. A shortcoming of this thermal
cover is its cost and mechanical complexity.

Another prior art thermal protector is a rigid thermal protector which
20 covers the window during the first phases of the flight and which is released
completely from the missile at the beginning of the terminal phase of the flight.
This thermal cover is less costly and mechanically simpler than the first prior
art thermal cover. A shortcoming of this thermal cover is that when this thermal

cover is released it may hit the rear part of the missile. thereby causing damage to the missile.

There is therefore a need for an inexpensive thermal shield for a missile seeker that does not damage the missile when released.

5 SUMMARY OF THE INVENTION

The present invention is a soft removable thermal shield for a guided missile seeker head and a method of operation thereof.

According to the teachings of the present invention there is provided, a soft removable thermal shield for protecting a heat-sensitive element of a
10 projectile, comprising: (a) a main body configured to: (i) cover at least part of a window of the projectile, the element being disposed behind the window; (ii) thermally protect the element during at least part of a flight of the projectile; and (iii) be sufficiently soft upon being released from the projectile during the
15 flight that the main body is substantially harmless to the projectile after being released; and (b) an attachment arrangement for releasably connecting the main body to the projectile.

According to a further feature of the present invention the main body includes an ablative material.

According to a further feature of the present invention the ablative
20 material is ablative rubber.

According to a further feature of the present invention, there is also provided: (c) a reinforcement of the main body.

According to a further feature of the present invention the reinforcement includes at least one layer of textile fabric.

According to a further feature of the present invention, there is also provided: (c) a protective layer that is disposed adjacent to the window when
5 the main body is operationally connected to the projectile, wherein a coefficient of friction between the protective layer and the window is sufficiently low to allow the main body to release substantially easily from the window and to leave the window substantially clean of a residue of the main body.

According to a further feature of the present invention the protective
10 layer includes at least one layer of glass fiber fabric.

According to a further feature of the present invention the attachment arrangement includes at least one cord, the at least one cord having two ends, one of the ends being configured for attachment to the main body, and another of the ends being configured for attachment to the projectile.

15 According to a further feature of the present invention the attachment arrangement includes at least one cord, the at least one cord having two ends and a middle section, at least part of the middle section being mechanically connected to the main body, each of the two ends being configured for attachment to the projectile.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

Fig. 1 is a schematic view from above of a missile having a soft removable thermal shield disposed thereon that is constructed and operable in accordance with a preferred embodiment of the invention;

Fig. 2 is a cross-sectional view taken along line 2-2 of Fig. 1;

Fig. 3 is a detailed cross-sectional view of a main body and an attachment arrangement of the thermal shield of Fig. 1; and

Fig. 4 is a detailed cross-sectional view of a main body and an alternate attachment arrangement of the thermal shield of Fig. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is a soft removable thermal shield construction and method of operation thereof.

The principles and operation of the soft removable thermal shield according to the present invention may be better understood with reference to the drawings and the accompanying description.

Reference is now made to Fig. 1 and Fig. 2. Fig. 1 is a schematic view from above of a horizontally flying projectile 10, specifically a guided missile, having a soft removable thermal shield 12, disposed on the nose section 18 thereof, that is constructed and operable in accordance with a preferred embodiment of the present invention. Fig. 2 is a cross-sectional view taken

along line 2-2 of Fig. 1. Thermal shield 12 has a main body 14 and an attachment arrangement 16. Nose section 18 includes a window 20. Within projectile 10 and behind window 20 is an element 22, for example a seeker head, which is sensitive to thermal exposure. Main body 14 is configured to cover window 20 and to thermally protect element 22 and window 20 during the initial part of the flight of projectile 10. Main body 14 is also configured to be sufficiently soft, upon release from projectile 10 during the flight, that main body 14 is substantially harmless to projectile 10 after being released. The softness of main body 14 takes into account the relative velocities of main body 14 and projectile 10 after the release of main body 14 from projectile 10. In particular, main body 14 is substantially harmless to the tail section 24 of projectile 10. In accordance with a preferred embodiment of the present invention, main body 14 is inherently soft. In accordance with a most preferred embodiment of the present invention main body 14 is initially relatively rigid but becomes soft during the flight, for example, by being formed from an ablative material such as ablative rubber whereby main body 14 is thick and hard at the beginning of the flight, but enough of main body 14 ablates during the flight so that main body 14 is soft when released. It should be noted that an ablative material, such as ablative rubber, provides thermal protection to element 22 and window 20, as the ablative material absorbs heat by ablating. Attachment arrangement 16 is configured to operationally connect main body 14 and projectile 10 prior to the release.

Reference is now made to Fig. 3, which is a detailed cross-sectional view of main body 14 and projectile 10 of thermal shield 12 of Fig. 1. Main body 14 typically includes an outer layer 26 of reinforced ablative material, typically ablative rubber, which is reinforced by one or more layers 28 of textile fabric. Outer layer 26 faces away from window 20 when main body 14 is operationally connected to projectile 10. Therefore, outer layer 26 and reinforcement layers 28 provide a flexible, soft thermal protection. In accordance with a preferred embodiment of the present invention, thermal shield 12 also includes at least one protective layer 30, typically formed from glass fiber fabric. Protective layer 30 forms an inner layer of main body 14, such that, protective layer 30 is disposed adjacent to window 20 when main body 14 is operationally connected to projectile 10. The coefficient of friction between protective layer 30 and window 20 is sufficiently low to allow main body 14 of thermal shield 12 to release substantially easily from window 20 and to leave window 20 substantially clean from a residue of main body 14. Attachment arrangement 16 includes at least one cord 32. In accordance with a most preferred embodiment of the present invention, cord 32 has two ends 34, 36 and a middle section 38. Part of middle section 38 is mechanically connected to main body 14, typically by sandwiching middle section 38 between layers 28 and protective layer 30. End 34 and end 36 are configured for attachment to projectile 10. Methods of attaching attachment arrangement 16 to projectile 10 and releasing therefrom are known to those skilled in the art.

Reference is now made to Fig. 4, which is a detailed cross-sectional view of main body 14 and an alternate attachment arrangement 16 of thermal shield 12 of Fig. 1. In accordance with an alternate preferred embodiment of the present invention, attachment arrangement 16 has at least two cords 40, 42.

5 Cord 40 has two ends 44, 46. Cord 42 has two ends 48, 50. Ends 44, 48 are mechanically connected to main body 14, typically by sandwiching ends 44, 48 between layers 28 and protective layer 30. End 46 and end 50 are configured for attachment to projectile 10.


It will be appreciated by persons skilled in the art that the present
10 invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and sub-combinations of the various features described hereinabove, as well as variations and modifications thereof that are not in the prior art which would occur to persons skilled in the art upon reading the
15 foregoing description.

WHAT IS CLAIMED IS:

1. A soft removable thermal shield for protecting a heat-sensitive element of a projectile, comprising:
 - (a) a main body configured to:
 - (i) cover at least part of a window of the projectile, the element being disposed behind said window;
 - (ii) thermally protect the element during at least part of a flight of the projectile; and
 - (iii) be sufficiently soft upon being released from the projectile during said flight that said main body is substantially harmless to the projectile after being released; and
 - (b) an attachment arrangement for releasably connecting said main body to the projectile.
2. The thermal shield of claim 1, wherein said main body includes an ablative material.
3. The thermal shield of claim 2, wherein said ablative material is ablative rubber.
4. The thermal shield of claim 1, further comprising:
 - (c) a reinforcement of said main body.

5. The thermal shield of claim 4, wherein said reinforcement includes at least one layer of textile fabric.
6. The thermal shield of claim 1, further comprising:
 - (c) a protective layer that is disposed adjacent to said window when said main body is operationally connected to the projectile, wherein a coefficient of friction between said protective layer and said window is sufficiently low to allow said main body to release substantially easily from said window and to leave said window substantially clean of a residue of said main body.
7. The thermal shield of claim 6, wherein said protective layer includes at least one layer of glass fiber fabric.
8. The thermal shield of claim 1, wherein said attachment arrangement includes at least one cord, said at least one cord having two ends, one of said ends being configured for attachment to said main body, and another of said ends being configured for attachment to the projectile.

9. The thermal shield of claim 1, wherein said attachment arrangement includes at least one cord, said at least one cord having two ends and a middle section, at least part of said middle section being mechanically connected to said main body, each of said two ends being configured for attachment to the projectile.



Mark M. Friedman
Advocate, Patent Attorney
Beit Samueloff
7 Haomanim
67897 Tel Aviv

Fig. 1

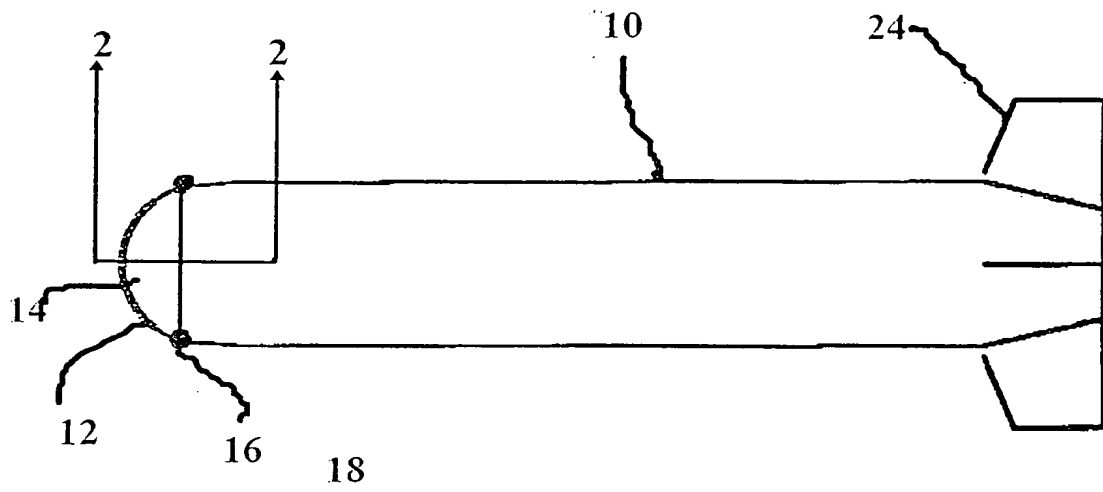


Fig. 2

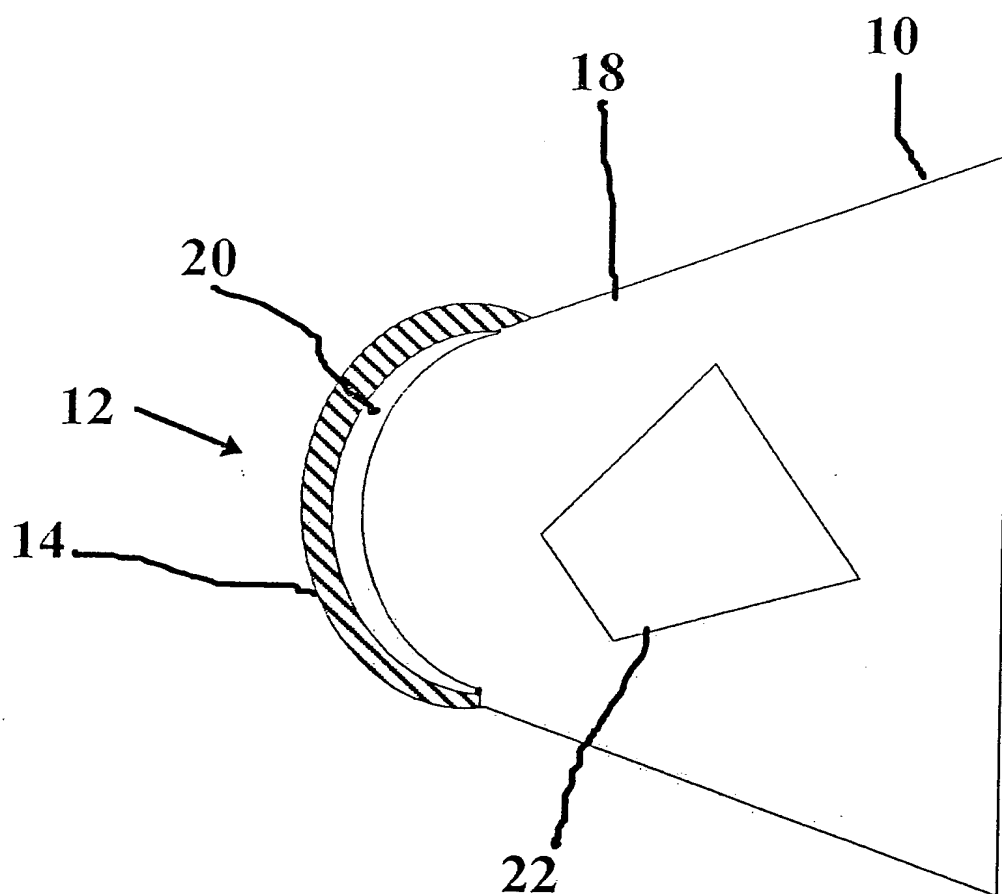


Fig. 3

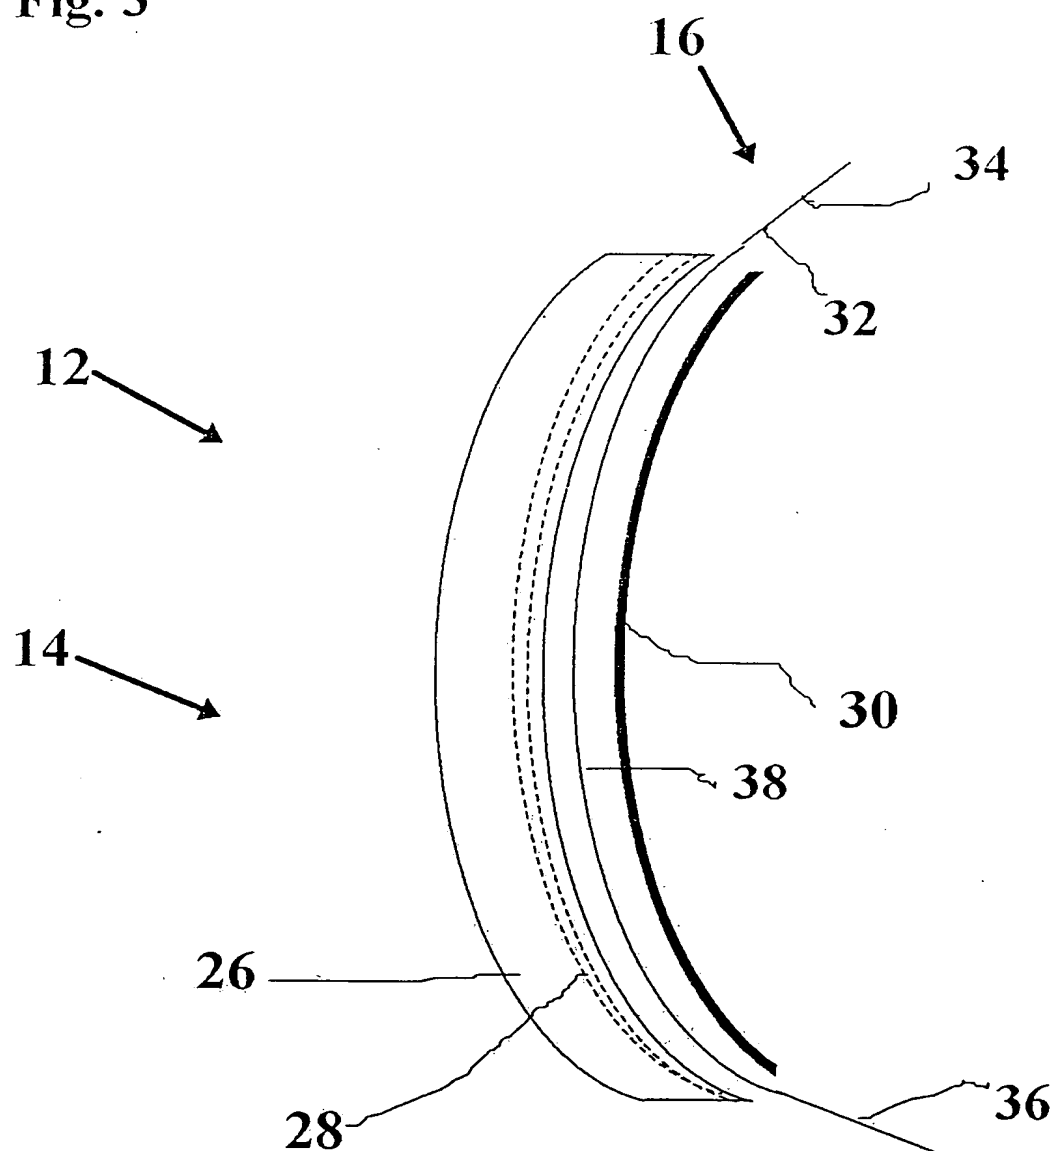


Fig. 4

